

# SUCTION HOSE

## 9904 – WEATHERFLEX EPDM


### ASSEMBLIES WITH MALE & FEMALE NPSH THREADED COUPLINGS



**FLEXIBLE IN COLD WEATHER**

1-1/2" X 20'	9904-150X20MF
2" X 20'	9904-2X20MF
2-1/2" X 20'	9904-250X20MF
3" X 20'	9904-3X20MF
4" X 20'	9904-4X20MF
6" X 20'	9904-6X20MF

### ASSEMBLIES WITH MALE & FEMALE CAM LOCK COUPLINGS

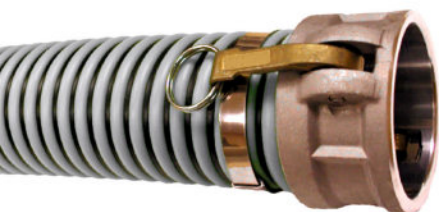

**AVAILABLE IN GREEN OR GRAY  
(MOST SIZES)**

1-1/2" X 20'	9904-150X20CE
2" X 20'	9904-2X20CE
2-1/2" X 20'	9904-250X20CE
3" X 20'	9904-3X20CE
4" X 20'	9904-4X20CE
6" X 20'	9904-6X20CE

FOR ASSEMBLIES WITH FEMALE CAM X MALE NPT:  
REPLACE THE CE IN ABOVE PART NUMBER WITH CN

**ALSO AVAILABLE WITH BALL & SOCKET COUPLINGS**

**100 FT MAX ROLL**

**BULK HOSE**

**-30 TO +140 DEG F**

SIZE (ID)	ITEM NUMBER	PSI RATING	LBS / FOOT
1"	9904-100	80	0.25
1-1/4"	9904-125	70	0.30
1-1/2"	9904-150	60	0.50
2"	9904-200	60	0.70

SIZE (ID)	ITEM NUMBER	PSI RATING	LBS / FOOT
2-1/2"	9904-250	50	0.90
3"	9904-300	50	1.20
4"	9904-400	45	1.85
6"	9904-600	35	3.90

SMOOTH EPDM RUBBER TUBE • CORRUGATED COVER FOR FLEXIBILITY

• AVAILABLE WITH WIRE REINFORCEMENT SIZES 3" & UP

• FULL VACUUM RATING IN ALL SIZES (AT AMBIENT TEMPERATURE)

**ALSO AVAILABLE WITH TEXTILE BRAID OR WIRE REINFORCEMENT (SELECT SIZES)**

PSI RATING LISTED IS THE RECOMMENDED MAX OPERATING PRESSURE OF THE BULK HOSE ONLY  
HOSE ASSEMBLY WORKING PRESSURE RATING IS DEPENDENT ON THE COUPLING TYPE