


SUCTION HOSE

9901 – RUBBER WATER SUCTION

ASSEMBLIES WITH MALE & FEMALE NPSH THREADED COUPLINGS

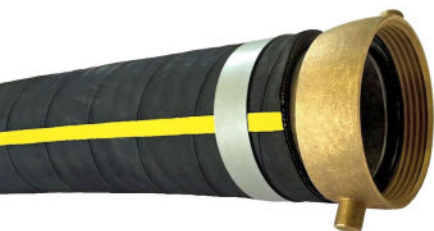

1-1/2" X 20'	9901-150X20MF
2" X 20'	9901-2X20MF
2-1/2" X 20'	9901-250X20MF
3" X 20'	9901-3X20MF
4" X 20'	9901-4X20MF
6" X 20'	9901-6X20MF

ASSEMBLIES WITH MALE & FEMALE CAM LOCK COUPLINGS



1-1/2" X 20'	9901-150X20CE
2" X 20'	9901-2X20CE
2-1/2" X 20'	9901-250X20CE
3" X 20'	9901-3X20CE
4" X 20'	9901-4X20CE
6" X 20'	9901-6X20CE

CORRUGATED COVER AVAILABLE

FOR ASSEMBLIES WITH FEMALE CAM X MALE NPT:
REPLACE THE CE IN ABOVE PART NUMBER WITH CN

8" – 12" ASSEMBLIES AVAILABLE WITH CAM, FLANGE, NPT OR BALL & SOCKET COUPLINGS

100 FT MAX ROLL THROUGH 8"

BULK HOSE

-25 TO +180 DEG F

SIZE (ID)	ITEM NUMBER	PSI RATING	LBS / FOOT
1"	9901-100	150	0.52
1-1/4"	9901-125	150	0.63
1-1/2"	9901-150	150	0.80
2"	9901-200	150	1.10
2-1/2"	9901-250	150	1.75
3"	9901-300	150	2.25

SIZE (ID)	ITEM NUMBER	PSI RATING	LBS / FOOT
4"	9901-400	150	2.80
5"	9901-500	150	3.25
6"	9901-600	150	5.75
8"	9901-800	100	6.60
10"	9901-010	75	10.25
12"	9901-012	75	13.50

CAPABLE OF FULL VACUUM THROUGH 8 INCH DIAMETER (AT AMBIENT TEMPERATURE)

AVAILABLE WITH SAND & GRAVEL RESISTANT GUM RUBBER TUBE

**PSI RATING LISTED IS THE RECOMMENDED MAX OPERATING PRESSURE OF THE BULK HOSE ONLY
HOSE ASSEMBLY WORKING PRESSURE RATING IS DEPENDENT ON THE COUPLING TYPE**