

# SUCTION HOSE

## 7909 – LOW TEMP CLEAR PVC


### ASSEMBLIES WITH MALE & FEMALE NPSH THREADED COUPLINGS



**FLEXIBLE IN COLD WEATHER**

1-1/2" X 20'	7909-150X20MF
2" X 20'	7909-2X20MF
2-1/2" X 20'	7909-250X20MF
3" X 20'	7909-3X20MF
4" X 20'	7909-4X20MF
6" X 20'	7909-6X20MF

### ASSEMBLIES WITH MALE & FEMALE CAM LOCK COUPLINGS

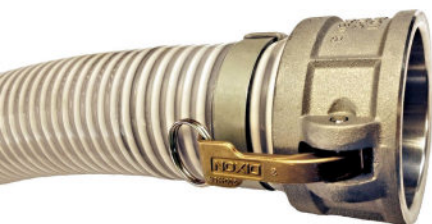

**CORRUGATED COVER AVAILABLE**

**FDA COMPLIANT MATERIAL AVAILABLE**

1-1/2" X 20'	7909-150X20CE
2" X 20'	7909-2X20CE
2-1/2" X 20'	7909-250X20CE
3" X 20'	7909-3X20CE
4" X 20'	7909-4X20CE
6" X 20'	7909-6X20CE

FOR ASSEMBLIES WITH FEMALE CAM X MALE NPT:  
REPLACE THE CE IN ABOVE PART NUMBER WITH CN

**8" – 12" ASSEMBLIES AVAILABLE WITH CAM, FLANGE, NPT OR BALL & SOCKET COUPLINGS**

**100 FT MAX ROLL THROUGH 6"**

### BULK HOSE

**-10 TO +130 DEG F**

SIZE (ID)	ITEM NUMBER	PSI RATING	LBS / FOOT
1"	7909-100	100	0.30
1-1/4"	7909-125	90	0.40
1-1/2"	7909-150	90	0.50
2"	7909-200	70	0.75
2-1/2"	7909-250	65	1.05
3"	7909-300	55	1.35

SIZE (ID)	ITEM NUMBER	PSI RATING	LBS / FOOT
4"	7909-400	50	2.10
5"	7909-500	45	3.05
6"	7909-600	45	4.50
8"	7909-800	40	6.90
10"	7909-10	40	12.25
12"	7909-12	35	15.50

**CAPABLE OF FULL VACUUM THROUGH 8 INCH DIAMETER (AT AMBIENT TEMPERATURE)**

**FOR CORRUGATED COVER SEE TYPE 7903 AT CAPITALRUBBERCORP.COM**

**PSI RATING LISTED IS THE RECOMMENDED MAX OPERATING PRESSURE OF THE BULK HOSE ONLY  
HOSE ASSEMBLY WORKING PRESSURE RATING IS DEPENDENT ON THE COUPLING TYPE**