


# ***SUCTION HOSE***

## **9914 / 9924 – REINFORCED *WEATHERFLEX***

### ***WEATHERFLEX ULTRA***

#### **9914 ASSEMBLIES WITH MALE & FEMALE CAM LOCK COUPLINGS**

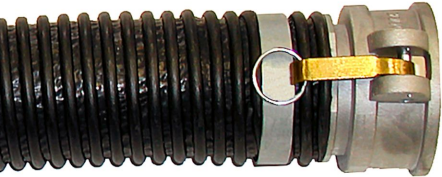

1-1/2" X 20'	9914-150X20CE
2" X 20'	9914-2X20CE
3" X 20'	9914-3X20CE
4" X 20'	9914-4X20CE


TEXTILE BRAID REINFORCED - SMOOTH EPDM RUBBER TUBE

FLEXIBLE IN COLD WEATHER – HIGHER PRESSURE RATING THAN *WEATHERFLEX* 9904

*NOT RECOMMENDED FOR HIGH HEAT OR HIGH VACUUM APPLICATIONS*

### ***WIREFLEX***

#### **9924 ASSEMBLIES WITH MALE & FEMALE CAM LOCK COUPLINGS**

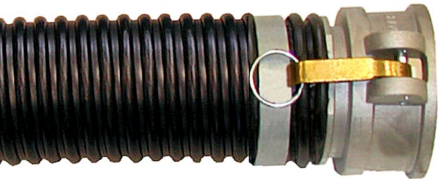

3" X 20'	9924-3X20CE
4" X 20'	9924-4X20CE
6" X 20'	9924-6X20CE

8 INCH ASSEMBLIES BY REQUEST

WIRE REINFORCED

WIRE HELIX REINFORCED - SMOOTH EPDM RUBBER TUBE

DURABLE HOSE FOR HYDRO-EXCAVATION AND VACUUM TRUCKS

**FOR HEAVY DUTY VACUUM TRUCK APPLICATIONS, SEE TYPE 5903 OR CONTACT US FOR  
CUSTOM MANUFACTURED ABRASION RESISTANT HOSE OPTIONS**

-30 TO + 140 DEG F

### **BULK HOSE**

-30 TO + 220 DEG F

#### ***9914 TEXTILE BRAID***

#### ***9924 WIRE REINFORCED***

SIZE ID:	ITEM NUMBER	PSI RATING	LBS / FT
1-1/2"	9914-150	100	0.55
2"	9914-200	100	0.90
3"	9914-300	85	1.50
4"	9914-400	70	2.30

SIZE ID:	ITEM NUMBER	PSI RATING	LBS / FT
3"	9924-300	100	1.50
4"	9924-400	100	2.25
5"	9924-500	85	3.25
6"	9924-600	70	3.95
8"	9924-800	85	5.25

FULL ROLL PURCHASE REQUIRED IN SOME SIZES

8 INCH FULL ROLL IS 50 FT, ALL OTHER SIZES 100 FT

OTHER CONFIGURATIONS INCLUDING BALL AND SOCKET COUPLINGS AVAILABLE

**PSI RATING LISTED IS THE RECOMMENDED MAX OPERATING PRESSURE OF THE BULK HOSE ONLY  
HOSE ASSEMBLY WORKING PRESSURE RATING IS DEPENDENT ON THE COUPLING TYPE**